


DB Spot LED Machine Lamp

Patent
New Type M 225215
Invention I 330239

Features

- ◆ Waterproof lamp head, tempered glass, no water or oil enter the lamp head, used ideally on machine that lubricant or cooling liquid is applied.
- ◆ Premium Aluminum alloy with anodized treated on lamp head and arms for scratch preventing.
- ◆ Two shades for fast heat dissipation, low temperature and extensive bulb service life as well as prevents light fades from long-term use.
- ◆ It's long lifespan, low energy consumption and electricity costs saving reaching to 80%, compared with halogen lamp.
- ◆ No problem of flickering and provides more steadily brightness while machine is working and vibrating




Specification

Patent	Reform of work lighting with thermal insulation New Type M 225215 The structure of work lighting arm joint Invention I 330239
Head Structure	Double shades for heat dissipation
Voltage	12V,24V(AC/DC)/AC100V ~240V/120V/230V
Power	5W
Glass material	Tempered glass
Switch	On/off switch
Protection	IP54/ IP65
Beam angle	Approx.25° (38° is on request.)

Accessory(Optional)

	Wall Bracket	Clamp
	Portable Stand	Magnetic Base



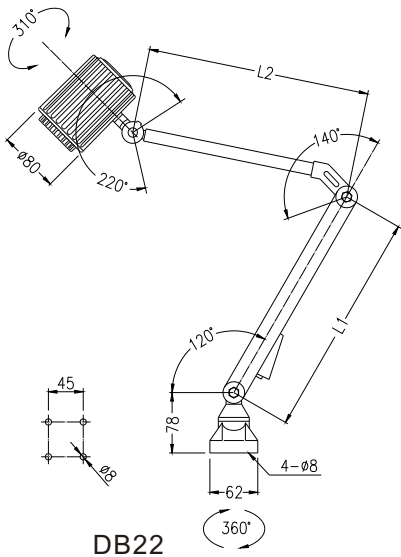


DB22

Model


Voltage 12V AC/DC	Voltage 24V AC/DC	Arm length L1*L2(mm)	Voltage 12V AC/DC	Voltage 24V AC/DC	Arm length L1*L2(mm)
Model No.					
DBN-12	DBN-24	—	DB33-12	DB33-24	320*380
DB22-12	DB22-24	200*280	DB35-12	DB35-24	320*490
DB23-12	DB23-24	200*380	DB45-12	DB45-24	420*490

Model

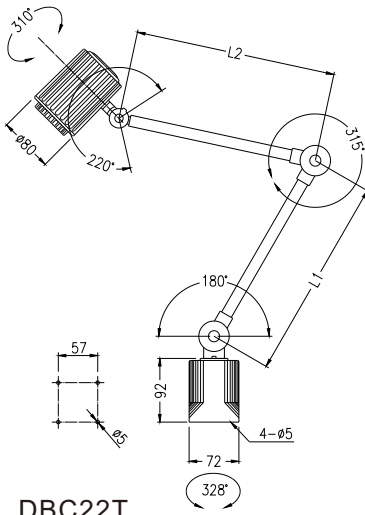

DBC22T

Voltage 12V AC/DC	Voltage 24V AC/DC	Voltage AC100~240V	Voltage 120V	Voltage 230V	Arm length (mm)
Model No.					
DBCN-12	DBCN-24	DBCNT-X	DBCNT-1	DBCNT-2	-
DBC10-12	DBC10-24	DBC10T-X	DBC10T-1	DBC10T-2	220
DBC20-12	DBC20-24	DBC20T-X	DBC20T-1	DBC20T-2	280
DBC30-12	DBC30-24	DBC30T-X	DBC30T-1	DBC30T-2	380
DBC11-12	DBC11-24	DBC11T-X	DBC11T-1	DBC11T-2	220*220
DBC22-12	DBC22-24	DBC22T-X	DBC22T-1	DBC22T-2	280*280
DBC33-12	DBC33-24	DBC33T-X	DBC33T-1	DBC33T-2	380*380

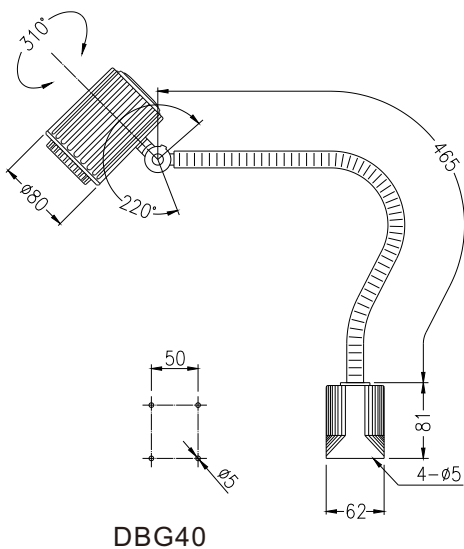

DBG40

Model

Voltage 12V AC/DC	Voltage 24V AC/DC	Voltage AC100~240V	Voltage 120V	Voltage 230V	Arm length (mm)
Model No.					
DBG40-12	DBG40-24	DBG40T-X	DBG40T-1	DBG40T-2	465
DBG60-12	DBG60-24	DBG60T-X	DBG60T-1	DBG60T-2	620
DBG80-12	DBG80-24	DBG80T-X	DBG80T-1	DBG80T-2	800

